


BALTIC LADY

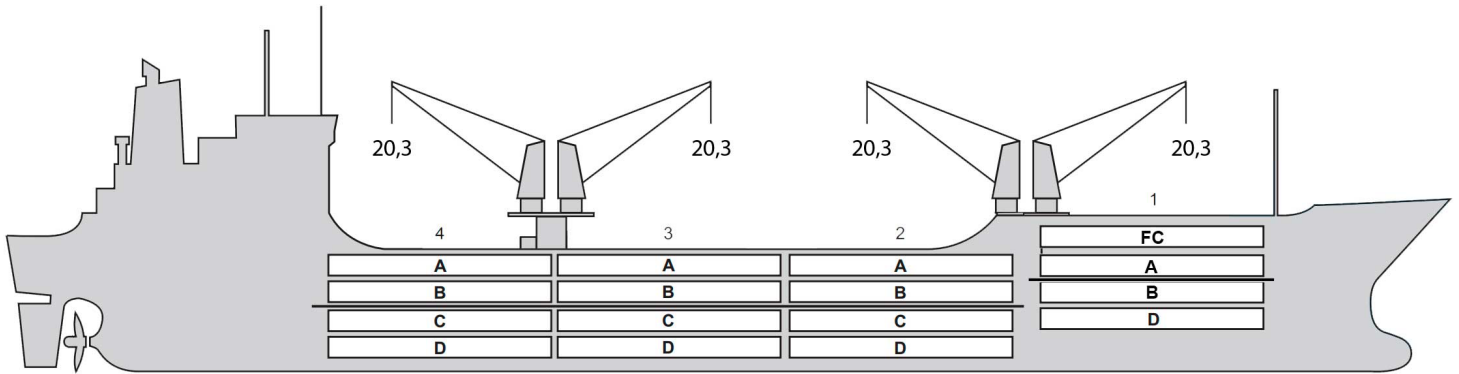

BASICS

Flag	BAHAMAS
Lloyds no.	9160736
Class	RINA
Int GRT/NRT	11,443 / 6,336
Pan GRT/NRT	/9,880
Suez GRT/NRT	12,304 / 9,166
Built	2000
Length over all m	155.25
Breadth moulded m	23.40
Depth W.D. m	13.2
Sdwt mton	12,913
Draught sdwt m	9.50
Bale cbft	590,227
Area m ²	6,906
Bow thruster	N/A
Hatch covers	4
Holds/Compartments	4/1 6
Fcsl deck	YES
Trunk deck	NO
USDA	Sensors fitted
PPECB	Sensors fitted
Reefer plugs	120
Grating load	7 MT Axleload Pneumatic tires
Grating	Aluminium
Temp min/max °C	-30 / 15
Air circs/hour	90
Air renew/hour	2.5

BALE cbft

DECK & HATCH	1	2	3	4
FC	43,067			
A	34,501	47,526	47,392	48,750
B	21,370	42,896	42,817	46,963
C	16,515	36,841	42,493	36,922
D		24,787	33,750	23,617
Total	115,453	152,050	166,452	156,272

Grand total 590,227

DECK AREA m2

DECK & HATCH	1	2	3	4
FC	466			
A	357	540	534	558
B	241	504	534	540
C	173	444	530	445
D		313	425	302
Total	1237	1,801	2,023	1,845

Grand total 6,906

Free deckheight minimum 2.20 m

HATCHES (Weather deck) m

Hatch	Length	Width	Insulated units
1	6.16	6.0	1FA/BC
2	12.8	8.0	AB/CD
3	12.8	8.0	AB/CD
4	12.8	8.0	AB/CD

Insulated units are separate cooling sections.

BALTIC LADY

CARGO GEAR

No of	Type	SWL mton	UP mton
4	Electro hydraulic	20	-

Max single lift cap: 2 x 20 MT / 2 x 20 MT

Max twin lift cap : 40MT

MAXIMUM CONTAINER CAPACITY

	20 ft (8'6") Empty/ loaded	40 ft (9'6") Empty/ loaded	Stackweight 20 ft/ 40 ft
Weather Deck	150/150	74/74	72,0 / 90,0
Hatch covers	18/18	46/46	/ 30,0
Holds	72 / 72	36/36	96 / 120

Reefer plugs: 120

Above figures based on 14 M for loaded 20 ft and 25 MT for loaded 40 ft Subject Master approval, Stability & Visibility

All details believed to be correct but not guaranteed