


BALTIC PERFORMER

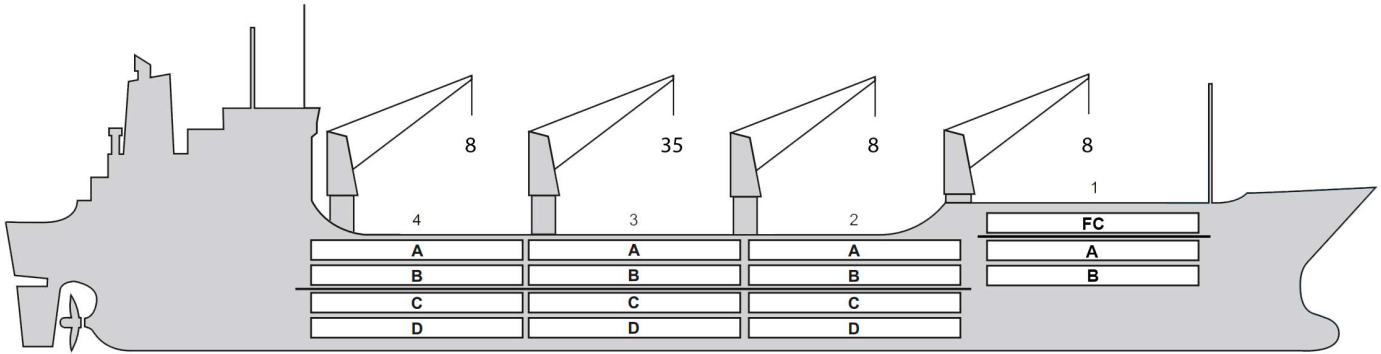

BASICS

Flag	Bahamas
Lloyds no.	9016674
Class	RINA
Int GRT/NRT	10,381 / 5,253
Pan GRT/NRT	11,397 / 8,688
Suez GRT/NRT	11,027 / 8,446
Built	1992
Length over all m	150.01
Breadth moulded m	22.50
Depth W.D. m	13.2
Sdwt mton	10,602
Draught sdwt m	
Bale cbft	526,764
Area m ²	5,850
Bow thruster	N/A
Hatch covers	4
Holds/Compartments	4 / 16
Fcsl deck	YES
Trunk deck	NO
USDA	Sensors fitted
PPECB	Sensors fitted
Reefer plugs	54
Grating load	5 MT Axleload Pneumatic tires
Grating	Wodden
Temp min/max °C	-30 / 15
Air circs/hour	90
Air renew/hour	2.5

BALE cbft

DECK & HATCH	1	2	3	4
FC	38,822			
A	26,772	43,042	43,960	45,574
B	16,993	35,464	38,649	37,384
C		31,710	38,271	34,944
D		27,779	36,513	30,887
Total	82,587	137,995	157,393	148,789

Grand total 526,764

DECK AREA m2

DECK & HATCH	1	2	3	4
FC	376			
A	260	440	459	464
B	178	419	462	444
C		378	461	413
D		314	434	348
Total	814	1,551	1,816	1,669

Grand total 5,850

Free deckheight minimum 2.20 m

HATCHES (Weather deck) m

Hatch	Length	Width	Insulated units
1	13.0	8.6	FAB
2	13.0	10.3	AB/CD
3	13.0	10.3	AB/CD
4	13.0	10.3	AB/CD

Insulated units are separate cooling sections.

BALTIC PERFORMER

CARGO GEAR

No of	Type	SWL mton	UP mton
3	Electro hydraulic	8,0	-
1	Electro hydraulic	35,0	

Max single lift cap: 2 x 35 MT / 2 x 8 MT

MAXIMUM CONTAINER CAPACITY

	20 ft (8'6") Empty/ loaded	40 ft (9'6") Empty/ loaded	Stackweight 20 ft/ 40 ft
Weather Deck	48/48	28/28	20/78
Hatch covers	86/86	37/37	20/76
Holds	108/108	54/54	-/-

Reefer plugs: 54

Above figures based on 14 M for loaded 20 ft and 27 MT for loaded 40 ft Subject Master approval, Stability & Visibility

All details believed to be correct but not guaranteed