


Crown Opal

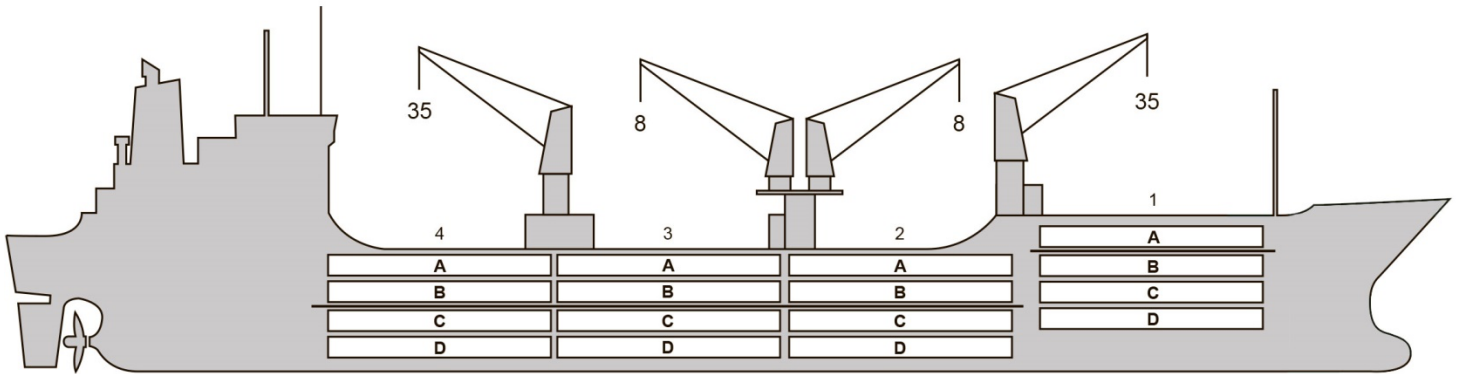

BASICS

Flag	Bahamas
LLoyds no.	9128063
Class	RINA
Int GRT/NRT	10,519 / 5,406
Pan GRT/NRT	10,519 / 8,863
Suez GRT/NRT	11,433 / 9,350
Built	1 997
Length over all m	151.99
Breadth moulded m	23.0
Depth W.D. m	13.0
Sdwt mton	10,316
Draught sdwt m	8.7
Bale cbft	547,633
Area m ²	6,230
Bow thruster	N/A
Hatch covers	4
Holds/Compartmens	4/16
Fcsl deck	YES
Trunk deck	NO
USDA	Sensors fitted
PPECB	Sensors fitted
Reefer plugs	68
Grating load	6 MT Axleload Pneumatic tires
Grating	Wood
Temp min/max °C	-30 / 32
Air circs/hour	90
Air renew/hour	4

BALE cbft

DECK & HATCH	1	2	3	4
FC				
A	45,136	43,584	45,014	44,832
B	25,952	37,443	39,973	39,641
C	20,087	30,972	38,621	34,924
D	8,612	26,150	37,113	29,639
Total	99,787	138,149	160,721	149,036

Grand total 547,693

DECK AREA m2

DECK & HATCH	1	2	3	4
FC				
A	489	460	476	475
B	304	436	481	475
C	213	381	475	434
D	107	281	432	307
Total	1,113	1,558	1,864	1,691

Grand total 6,226

Free deckheight minimum 2.20 m

HATCHES (Weather deck) m

Hatch	Length	Width	Insulated units
1	13.0	7.8	A/BCD
2	13.0	7.8	AB/CD
3	13.0	7.8	AB/CD
4	13.0	7.8	AB/CD

Insulated units are separate cooling sections.

Crown Opal

CARGO GEAR

No of	Type	SWL mton	UP mton
2	Electro hydraulic	35	-
2	Electro hydraulic	8	-

Max single lift cap: 2 x 35 MT / 2 x 8 MT

Max twin lift cap : N/A

MAXIMUM CONTAINER CAPACITY

	20 ft (8'6") Empty/ loaded	40 ft (9'6") Empty/ loaded	Stackweight 20 ft/ 40 ft
Weather Deck	132 / 92	64 / 44	48 / 60
Hatch covers	64 / 48	32 / 24	48 / 60
Holds	72 / 54	36 / 36	72 / 120

Reefer plugs: 68

Above figures based on 14 MT for loaded 20 ft and 30 MT for loaded 40 ft Subject Master approval, Stability & Visibility

Please contact Cool Carriers for information about speed and consumption

All details believed to be correct but not guaranteed