


Crown Sapphire

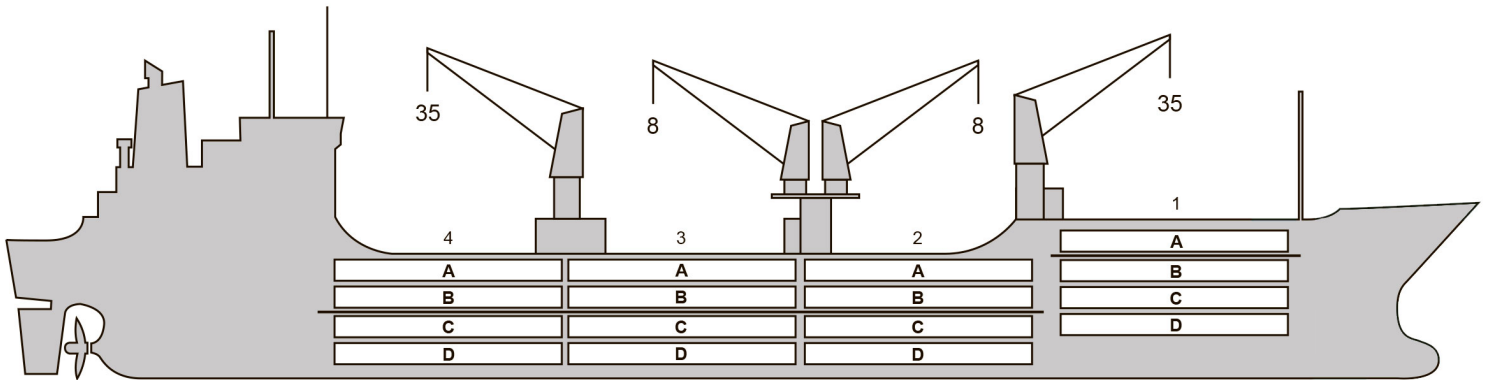

BASICS

Flag	Bahamas
LLoyds no.	9159115
Class	RINA
Int GRT/NRT	10,519 / 5,406
Pan GRT/NRT	10,519 / 9,050
Suez GRT/NRT	11,433 / 9,313
Built	1 997
Length over all m	151.99
Breadth moulded m	23.0
Depth W.D. m	13.0
Sdwt mton	10,334
Draught sdwt m	8.7
Bale cbft	547,546
Area m ²	6,227
Bow thruster	N/A
Hatch covers	4
Holds/Compartmens	4/16
Fcsle deck	YES
Trunk deck	NO
USDA	Sensors fitted
PPECB	Sensors fitted
Reefer plugs	70
Grating load	6 MT Axleload Pneumatic tires
Grating	Wood
Temp min/max °C	-30 / 32
Air circs/hour	90
Air renew/hour	4

BALE cbft

DECK & HATCH	1	2	3	4
FC				
A	45,168	43,562	44,866	44,742
B	25,884	37,537	39,896	39,625
C	20,226	30,857	38,613	34,967
D	8,617	26,189	37,140	29,657
Total	99,895	138,145	160,515	148,991

Grand total 547,546

DECK AREA m2

DECK & HATCH	1	2	3	4
FC				
A	487	462	477	475
B	308	439	479	475
C	213	377	474	433
D	106	279	433	308
Total	1,114	1,557	1,864	1,691

Grand total 6,227

Free deckheight minimum 2.20 m

HATCHES (Weather deck) m

Hatch	Length	Width	Insulated units
1	13.0	7.8	A/BCD
2	13.0	7.8	AB/CD
3	13.0	7.8	AB/CD
4	13.0	7.8	AB/CD

Insulated units are separate cooling sections.

Crown Sapphire

CARGO GEAR

No of	Type	SWL mton	UP mton
2	Electro hydraulic	35	-
2	Electro hydraulic	8	-

Max single lift cap: 2 x 35 MT / 2 x 8 MT

Max twin lift cap : N/A

MAXIMUM CONTAINER CAPACITY

	20 ft (8'6") Empty/ loaded	40 ft (9'6") Empty/ loaded	Stackweight 20 ft/ 40 ft
Weather Deck	132 / 92	64 / 46	48 / 60
Hatch covers	64 / 48	32 / 24	48 / 60
Holds	72 / 54	36 / 18	72 / 120

Reefer plugs: 70

Above figures based on 14 MT for loaded 20 ft and 30 MT for loaded 40 ft Subject Master approval, Stability & Visibility

Please contact Cool Carriers for information about speed and consumption

All details believed to be correct but not guaranteed