



SISTER SHIPS: CS PRIDE / CS ENDEAVOUR / CS LEADER


General

Built	2009
Flag	SINGAPORE
Port of Registry	SINGAPORE
Call sign	9V9352
IMO/Lloyds nr	9517903
Length over all [m]	162.5
Beam[m]	26
Depth [m]	14.1
Bow thruster	Available

	GT	NT
International	14276	6724
Panama canal		6724
Suez GRT/NRT	14852.64	12285.02
	Draft	DWAT
Summer	9.72m	12824 t

Reefer

Bale cbft	617.919
Area m2	6852.5
Hatch covers	4
Holds/Compartments	4/15
Cooling sections	1FC/AB, 2AB/CD, 3AB/CD, 4AB/CD
Fcsle deck	YES
Trunk deck	NO
USDA	Sensors fitted
PPECB	Sensors fitted
Reefer plugs	200
Grating load	7 MT Axleload pneumatic tires
Grating	Wooden
Temp min/max °C	-25/+15
Air circs/hour	90
Air renew/hour	2

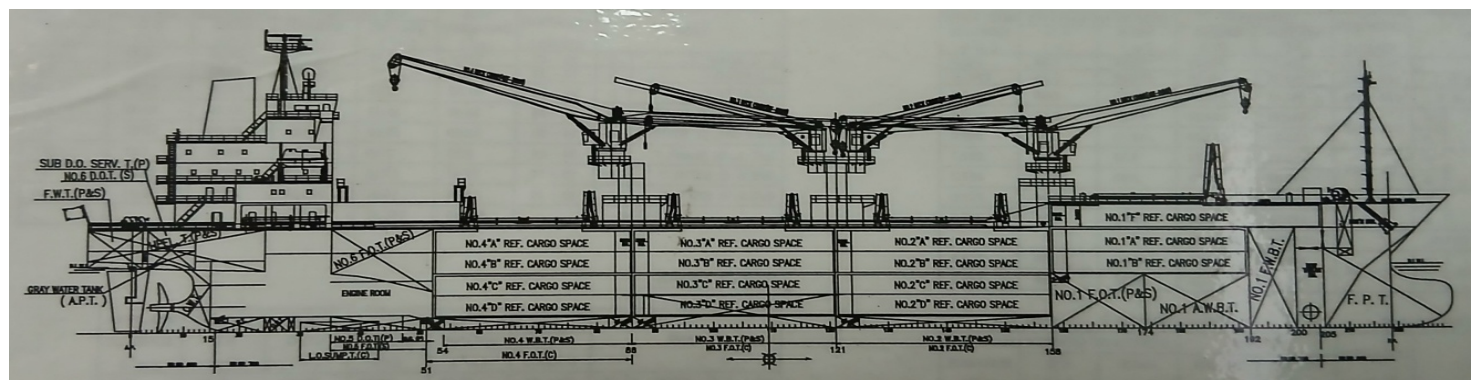

Reefer Compartment Capacity Breakdown

Bale capacity [cbft]

DECK & HATCH	1	2	3	4
FC	55860.7			
A	30356.5	54140.9	54098.5	52505.9
B	18420.1	43557.1	49613.6	45538.3
C		37338.2	45997.4	37320.5
D		30533.1	33849.1	28788.5
Total	104637	165569	183559	164154

Grand total 617.919 cbft

Deck area [m2]

DECK & HATCH	1	2	3	4
FC	589.7			
A	325.7	560.3	560.5	541.7
B	212	495.4	563.6	517.8
C		446.0	550.8	445.8
D		350.9	390.3	332.0
Total	1127.4	1852.6	2065.2	1837.3

Grand total 6852.5 m2

Free deckheight minimum 2.3 m

Hatch sizes [m]

Hatch	Length	Width	Insulated units
1	12,6	10,3	1F/AB
2	12,6	10,3	AB/CD
3	12,6	10,3	AB/CD
4	12,6	10,3	AB/CD

CARGO GEAR

No	Type	SWL mton	UP mton
4	Electro hydraulic	40/8	-

MAXIMUM CONTAINER CAPACITY

	40 ft (9'6")	Stackweight 20 ft/ 40 ft
Weather Deck	150 FEU+58TEU	60,/90-108
Hatch covers	70	40,50/60 - 108
Holds	56	/80-120

Total 276 FEU or 436 TEU + 58 FEU

Reefer plugs: 200

Particulars are given without guarantee and do not form part of any Charter Party agreement