


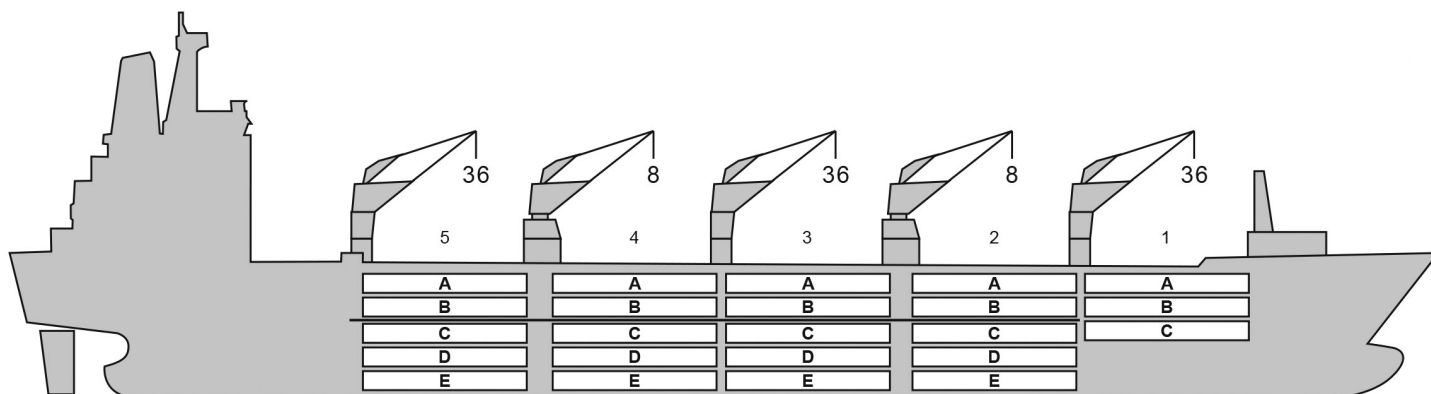

BASICS

Flag	BAHAMAS
LLoyds no.	8819938
Class	BV
Int GRT/NRT	14,406 / 6,673
Pan GRT/NRT	15,481 / 12,018
Suez GRT/NRT	15,225 / 12,234
Built	1990

Length over all m	164.33
Breadth moulded m	24.00
Depth W.D. m	15.7
Sdwt mton	16,950
Draught sdwt m	10.1
Bale cbft	758,725
Area m ²	9,010
Bow thruster	YES, AND STERN THRUSTER

Hatch covers	9
Holds/Compartments	5 / 23
Fcsl deck	NO
Trunk deck	NO
USDA	Sensors fitted
PPECB	Sensors fitted
Reefer plugs	184
Grating load	7 MT Axleload
	Pneumatic tires

Grating	Aluminium
Temp min/max °C	-29 / 15
Air circs/hour	90
Air renew/hour	4

BALE cbft

DECK & HATCH	1	2	3	4	5
A	37,858	33,895	34,548	34,870	34,973
B	28,810	32,988	34,319	34,326	34,174
C	20,288	30,855	34,870	34,870	35,428
D	-	28,037	34,344	35,538	34,196
E	-	19,190	28,164	28,846	22,686
Total	90,968	151,625	173,305	174,710	168,117
Grand total	758,725				

DECK AREA m² and DECK STRENGTH MT/m²

-	1	2	3	4	5
A	435 (1.8)	425 (1.8)	440 (1.8)	439 (1.8)	440 (1.8)
B	327 (1.8)	410 (1.8)	420 (1.8)	424 (1.8)	425 (1.8)
C	230 (1.8)	387 (1.8)	439 (1.8)	439 (1.8)	436 (1.8)
D	-	362 (1.8)	439 (1.8)	426 (1.8)	496 (1.8)
E	-	224 (1.8)	360 (1.8)	355 (1.8)	278 (1.8)
Total	992	1,808	2,098	2,096	2,016
Grand total	9,010				

(Figures in brackets : max deck strength in MT/m²)
Free deckheight minimum 2.20 m

HATCHES (Weather deck) m

Hatch	Length	Width	Insulated units
1	13.4	10.6	ABC
2	2 x 13.4	8.8	AB/CDE
3	2 x 13.4	8.8	AB/CDE
4	2 x 13.4	8.8	AB/CDE
5	2 x 13.4	8.8	AB/CDE

Insulated units are separate cooling sections.

CARGO GEAR

No of	Type	SWL mton	UP mton
2	Electro hydraulic	36 / 8	-
2	Electro hydraulic	8	-

Max single lift cap: 2 x 8 MT / 3 x 36 MT
 Max twin lift cap : -

MAXIMUM CONTAINER CAPACITY

	20 ft (8'6") Empty/ loaded	40 ft (9'6") Empty/ loaded	Stackweight 20 ft/ 40 ft
Weather Deck	60 / 40	24 / 16	28 - 42 / 65 - 75
Hatch covers	220 / 144	110 / 74	28 - 42 / 65 - 75
Holds	236 / 236	82 / 82	42 - 105 / 155

Reefer plugs: 184

Above figures based on 14 MT for loaded 20 ft and 30 MT for loaded 40 ft
 Subject Master approval, Stability & Visibility

Please contact Cool Carriers for information about speed and consumption

All details believed to be correct but not guaranteed